


HE245XX01

240 X 64 Dots

1. EXTERNAL DIMENSION AND DISPLAY PATTERN

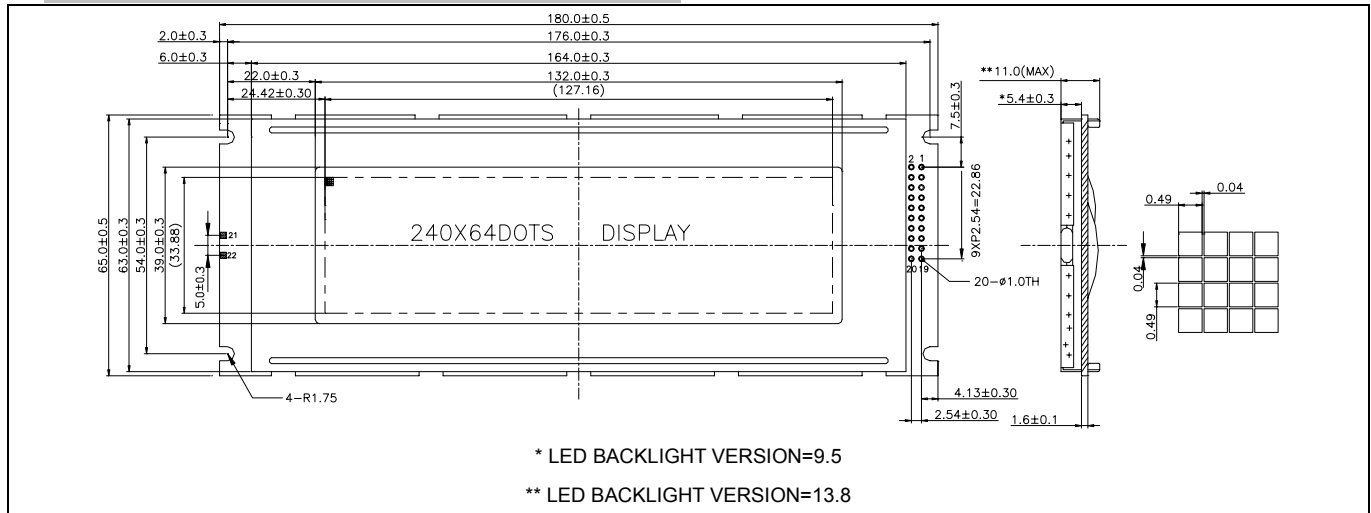

2. MECHANICAL DATA

ITEM	SPECIFICATION	UNIT
Module Size (W×H×T)	180.0×65.0×11.0 (LED:13.8)	mm
Viewing Area (W×H)	132.0×39.0	mm
Number of Dots (W×H)	240×64	dots
Dot Pitch (W×H)	0.53×0.53	mm
Dot Size (W×H)	0.49×0.49	mm


3. ELECTRICAL CHARACTERISTICS (Ta=25 °C)

ITEM	SYMBOL	CONDITION	SPEC. VALUE			UNIT
			MIN.	TYP.	MAX.	
Supply Voltage (Logic)	V _{DD} - V _{SS}		4.5	5.0	5.5	V
Supply Current (Logic)	I _{DD}	V _{DD} =5V	-	8.7	13.0	mA
Input Voltage	"HIGH"	V _{IH}	-	V _{DD} - 2.2	-	V _{DD}
	"LOW"	V _{IL}	-	0	-	0.8
Output Voltage	"HIGH"	V _{OH}	I _{OH} =3.0mA	V _{DD} - 0.3	-	V _{DD}
	"LOW"	V _{OL}	I _{OL} =3.0mA	-	-	0.3
LCD Operating Voltage	V _{DD} - V _o	V _{DD} =5V, Ta=25 °C	-	13.6	-	V
Supply Voltage LCD Drive	I _o		-	2.0	3.0	mA

4. PIN CONFIGURATION

PIN	SYMBOL	SIGNAL DESCRIPTION	PIN	SYMBOL	SIGNAL DESCRIPTION
1	FG	Frame Ground	12	DB ₁	Data Bit 1
2	V _{SS}	Ground	13	DB ₂	Data Bit 2
3	V _{DD}	Logic Voltage	14	DB ₃	Data Bit 3
4	V _o	Operating Voltage for LCD (Variable)	15	DB ₄	Data Bit 4
5	/WR	Write Signal	16	DB ₅	Data Bit 5
6	/RD	Read Signal	17	DB ₆	Data Bit 6
7	/CE	Chip Enable Signal	18	DB ₇	Data Bit 7
8	C/D	H : Instruction Code, L : Data Code	19	FS	Font Select Signal (H : 6×8dots, L : 8×8dots)
9	NC	No Connection	20	NC	No Connection
10	/RES	Reset Signal	21	A	Anode of LED Unit
11	DB ₀	Data Bit 0	22	K	Cathode of LED Unit

5. BLOCK DIAGRAM

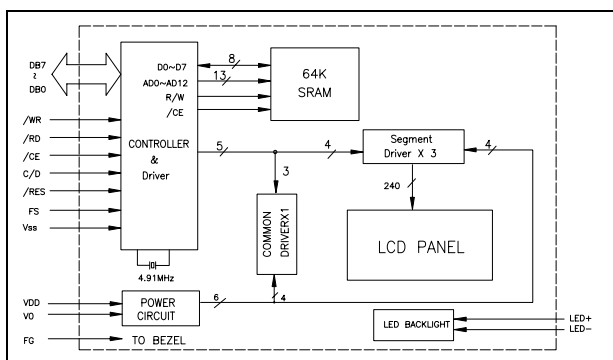

6. BACKLIGHTING CHARACTERISTICS (Ta=25 °C)

LED

ITEM	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
Supply Voltage	V _{LED}	-	-	8.2	8.5	V
Power Consumption	P _{LED}	I _F =400mA	-	3280	-	mW
Luminous	I _V	I _F =400mA	-	-	-	cd/m ²